



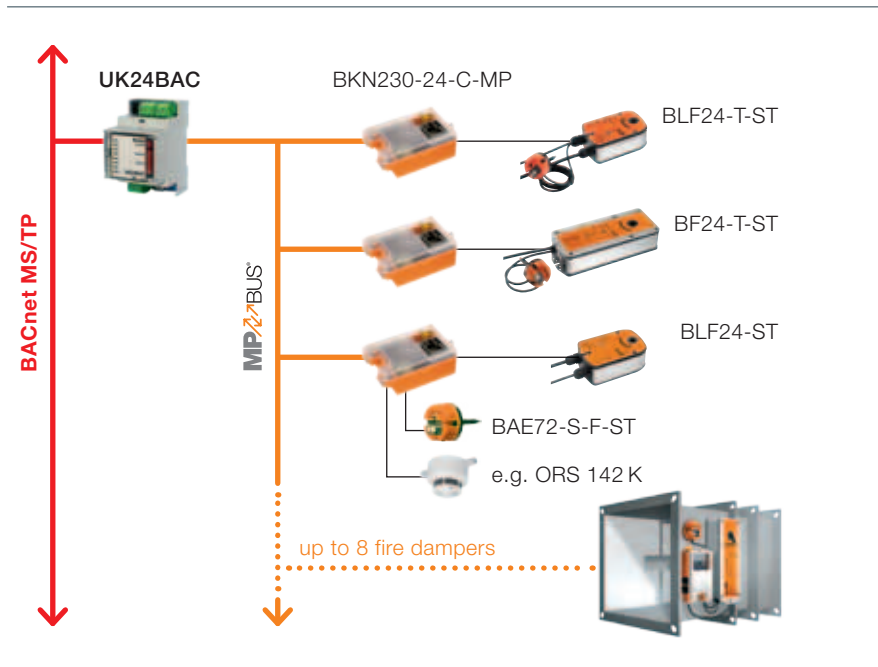
Belimo Gateway UK24BAC. Integrated fire protection with BACnet MS/TP.








The bus integration of motorised fire dampers has now become simpler and less expensive. The Gateway UK24BAC transmits the signals from up to eight Belimo fire damper actuators via BACnet MS/TP to the central controller. The damper positions can be visualised. The condition of the smoke detector, the thermoelectric tripping device as well as any faults which may arise are transmitted as a summary fault. That simplifies monitoring and thus enhances safety for people and tangible assets in buildings.

Belimo Gateway UK24BAC.


Safe, reliable, open.




- Simple maintenance and monitoring thanks to visualisation at the management level (per damper):
 - Position
 - Summary fault (thermoelectric tripping device, smoke detector, overload, etc.)
- Energy savings in the building – non-used zones can be sealed off with respect to energy use
- More safety through high transparency and remote access
- Reduction in installation costs
- Maximum flexibility and free selection of the DDC controller.

Gateway	Communication and power supply unit	Fire damper actuators	Thermoelectric tripping device	Smoke detector
UK24BAC	BKN230-24-C-MP	BLF24-T-ST / BF24-T-ST BLF24-ST / BF24-ST	BAE72-S-F-ST	e.g. Hekatron ORS 142K
				
Interface with BACnet MS/TP (RS485) for the connection of up to 8 fire damper actuators via the communication and power supply unit BKN230-24-C-MP.	Interface with the MP-Bus with integrated status display. Connection with supply for a smoke detector and / or a thermoelectric tripping device.	Fire damper actuators with or without thermoelectric tripping device and with a plug for simple and rapid connection with the communication and power supply unit.	Directs the motorised fire damper into safety position in the event that the respective triggering temperature is exceeded. Can be connected to the communication and power supply unit.	Optoelectronic smoke detector. Can be connected to the communication and power supply unit.


Belimo worldwide: www.belimo.com




5-year guarantee




On site around the globe




Complete product range



Tested quality



Short delivery times



Comprehensive Support

BELIMO Automation AG, Brunnenbachstrasse 1, CH-8340 Hinwil
Tel. +41 43 843 61 11, Fax +41 43 843 62 68, info@belimo.ch

